

## SKINTOP® MS-HF-M SC

SKINTOP® MS-HF-M SC, halogen-free brass cable gland with low-resistance screen contact and highly conductive, flexible EMC spring contact, easy to assemble

Hazard Level: HL 3



**CE UK CA**



/ , EMC

EMC

EMC

(01.05.2024)



# SKINTOP® MS-HF-M SC

DIN EN 45545-2 (HL3)  
DIN EN 45545-3 (E30)

DIN EN 60423  
DIN IEC 62444

SKINDICHT® SM-PE-M

ETIM 5:	ETIM 5.0 Class-ID: EC000441
	ETIM 5.0 :
ETIM 6:	ETIM 6.0 Class-ID: EC000441
	ETIM 6.0 Class :
:	T21
:	:
	:
	: UL 94 V-0
	:
가:	O- :
:	IP 68 - 5 bar
	Dynamic: -25°C up to +100°C
	: -40°C ~ +100°C

가 VAT 가 가 .



# SKINTOP® MS-HF-M SC

	Article designation / size	Ø F mm	(mm) Ø ,	SW (mm)	, C mm	Thread length D mm	/ PU
53112530	M 12 x 1,5	3.5 - 7	1	16	26.5	6.5	50
53112531	M 16 x 1,5	4.5 - 10	4	20	33.0	7	50
53112532	M 20 x 1,5	7 - 13	5	24	37.0	8	25
53112533	M 25 x 1,5	9 - 17	7.5	29	38.5	8	25
53112534	M 32 x 1,5	11 - 21	9	36	45.5	9	25
53112535	M 40 x 1,5	19 - 28	15	45	48.0	9	10
53112536	M 50 x 1,5	27 - 35	21	54	55.5	10	5

(01.05.2024)



©2024 Lapp Group - all rights reserved.

<http://lappkorea.lappgroup.com>

data sheet

PN 0456 / 02\_03.16

# SKINTOP® MS-HF-M SC

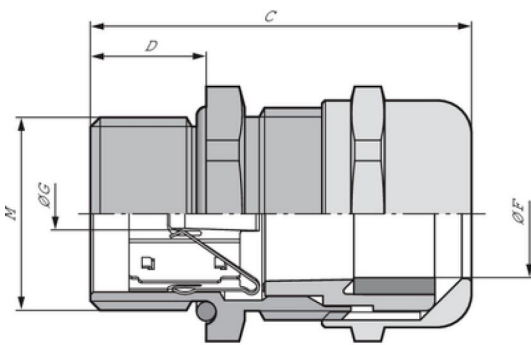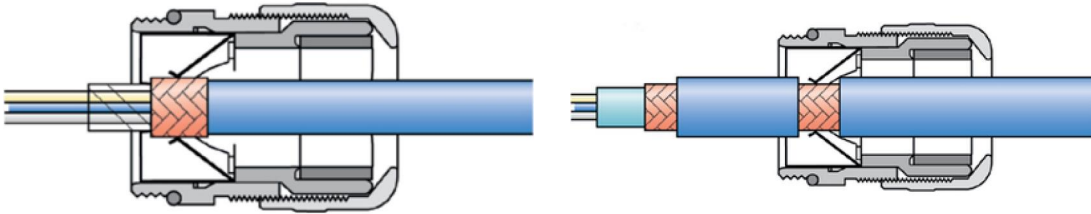

(01.05.2024)

©2024 Lapp Group - all rights reserved.  
<http://lappkorea.lappgroup.com>

data sheet

PN 0456 / 02\_03.16