


ETHERLINE® Cat.5e FD

Ethernet cable Category 5e, Class D for use in drag chain applications - verified up to 100 MHz

PUR (AWM) Cat.5e , 2 4 x2xAWG26/19

(60 m)

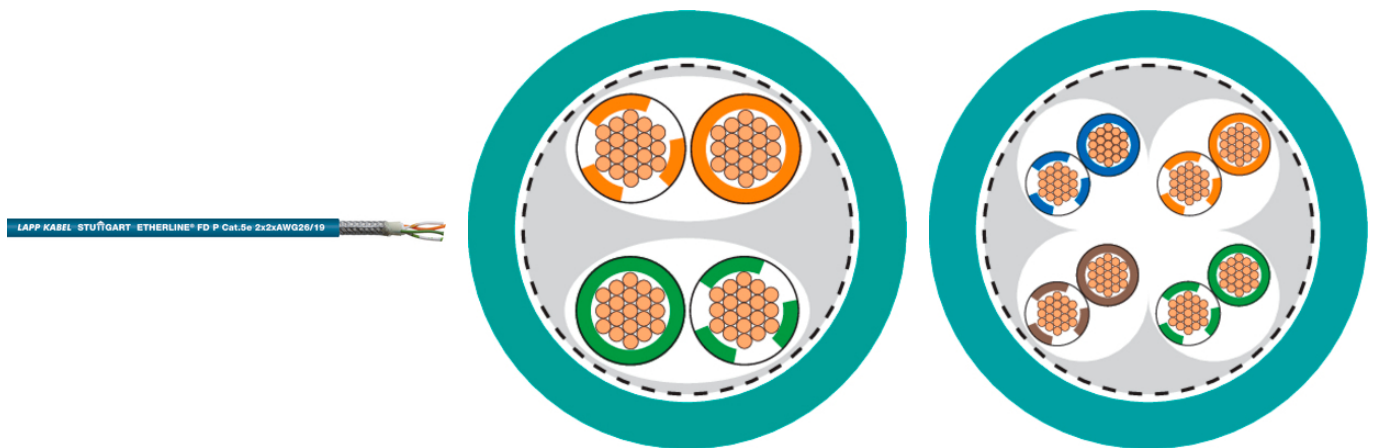

Lapp



/

가

(25.04.2024)

©2024 Lapp Group - all rights reserved.

<http://lappkorea.lappgroup.com>

data sheet

PN 0456 / 02_03.16

ETHERLINE® Cat.5e FD

PUR : 1000 V UL ,

2 : , 10/100Mbit/s
4 : 10/100/1000Mbit/s
(60 m)
EtherCAT EtherNet/IP
()

PUR : 1000 V UL ,

UL AWM 21576
: IEC 60332-1-2
VDE 0472-815

, 26AWG (19 x 0.10), (0.14 mm²)

2 : 가 ,
4-
:
PUR
: (RAL 5021)

ETIM 5:

ETIM 5.0 Class-ID: EC000830

ETIM 5.0 Class- :

ETIM 6:

ETIM 6.0 Class-ID: EC000830

ETIM 6.0 Class :

: () 125 V

:
: 8 x
: 15 x

: / : 1000 V
/ : 500 V

∴ 100 Ω IEC 61156-5

: Fixed installation: VDE -30°C to +80°C; UL/CSA -30°C to +80°C

Flexing: VDE -5°C to +50°C; UL/CSA -5°C to +80°C

, 가 가 . (.) 가 .
www.lappkabel.de/en/cable-standradlengths
: 100 m; (500; 1000) m
가 . /

(25.04.2024)

©2024 Lapp Group - all rights reserved.

<http://lappkorea.lappgroup.com>

data sheet

PN 0456 / 02_03.16



ETHERLINE® Cat.5e FD

가 VAT 가 가 .

(25.04.2024)

©2024 Lapp Group - all rights reserved.

<http://lappkorea.lappgroup.com>

data sheet

PN 0456 / 02_03.16



ETHERLINE® Cat.5e FD

Article number		AWG	(mm)	mm	(kg/km)	(kg/km)
2-pair version						
2170289	ETHERLINE® FD P CAT.5e	2 x 2 x AWG26/19	1	5.9	20	48
4-						
2170489	ETHERLINE® FD P CAT.5e	4 x 2 x AWG26/19	1	6.3	27	56