



EPIC® DATA PB Sub-D PRO

PROFIBUS 가 M12 /
D-Sub (9) PROFIBUS DP , , 360° , EMV (M12)
EMC ()

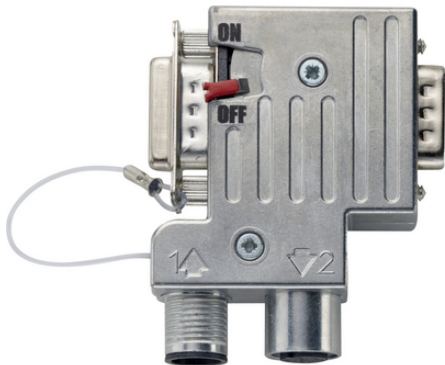

Lapp

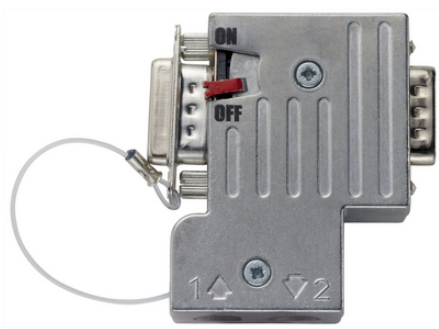

EMC

LED:
- (),
- (),
- ()

(200)

12 Mbit/s 가

(24.04.2024)

EPIC® DATA PB Sub-D PRO

4,75 ~ 5,25 V DC()

IEC 61158, IEC 61784

D-Sub , 9 , 4-40 UNC
(ZnAl) 360° () 가
가 /
(90° 35°): D-Sub , 9
EMV (PG)
M12 : 5 , M12 B

ETIM 5:

ETIM 5.0 Class-ID: EC001132

ETIM 5.0 : D-Sub-

ETIM 6:

ETIM 6.0 Class-ID: EC001132

ETIM 6.0 Class : D-Sub

:

:

가:

:

:

M12

IP 30

150 Ω

Sub-D , 9

/M12 B

:

0.08 ~ 0.5mm²(AWG 28 - AWG 14)

: 8 ~ 9mm

가 :

: -20 ~ +70°C

가 VAT 가 가 .

(24.04.2024)

©2024 Lapp Group - all rights reserved.

<http://lappkorea.lappgroup.com>

data sheet

PN 0456 / 02_03.16

EPIC® DATA PB Sub-D PRO

			PG-
21700563	ED-PB-AX-M12-PRO	M12	no
21700561	ED-PB-35-PG-M12-PRO	M12	yes
21700562	ED-PB-90-PG-M12-PRO	M12	yes
180 ° (AX)			
21700566	ED-PB-AX-M12-PRO		no
35 °			
21700564	ED-PB-35-PG-ST-PRO		yes
90 °			
21700565	ED-PB-90-PG-ST-PRO		yes