


# EPIC® POWER LS3 D6

EPIC® LS3

Made in Germany

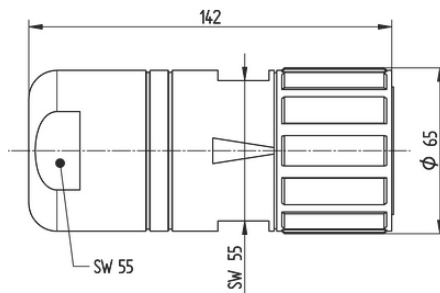

가

EMC

ETIM 5:	ETIM 5.0 Class-ID: EC002635	
	ETIM 5.0 class :	( )
ETIM 6:	ETIM 6.0 Class-ID: EC002635	
	ETIM 6.0 Class :	( )
(V):	630 V (10 mm )	

(12.07.2024)

# EPIC® POWER LS3 D6

	250 V (1.6 mm )
:	6 kV (10 mm )
	4 kV (1.6 mm )
(A):	150 A (10-mm ) 25 °C
	12 A (1.6-mm ), 25 °C
:	3
:	-
/ :	3+PE+2(10mm/1.6mm)
	3+PE+4(10mm/1.6mm)
:	: 10 - 50 mm <sup>2</sup> (10 mm contacts)
	: 0.75 - 1.5 mm <sup>2</sup> (1.6 mm contacts)
:	:
	: PA
	: FPM
가:	IP 67
:	50
:	-20 °C a ž la +120 °C

가 VAT 가 가 .

(12.07.2024)



## EPIC® POWER LS3 D6

	Article description	Clamping range min	Clamping range max		Packaging unit
LS3 D6					
44429344	LS3 D6	17	25	3+PE+2	1
44429345	LS3 D6	25	36	3+PE+2	1
44429346	LS3 D6	17	25	3+PE+4	1
44429347	LS3 D6	25	36	3+PE+4	1

(12.07.2024)

©2024 Lapp Group - all rights reserved.  
<http://lappkorea.lappgroup.com>

data sheet

PN 0456 / 02\_03.16