

EPIC® H-A 3 AGSV

2 가

UL50E



Housing in plastic or metal version for safe connections in the smallest possible space

1
2

:

(24.04.2024)

EPIC® H-A 3 AGSV

가

ETIM 5:

ETIM 5.0 Class-ID: EC000437

ETIM 5.0 class :

ETIM 6:

ETIM 6.0 Class-ID: EC000437

ETIM 6.0 Class-Description: Housing for industrial connectors

:

: - - ,

: -
: NBR

: 가 ,

: -
: NBR

가:

IP 65 (latched)

NEMA 250, UL50E: 12, 4 (latched)

VDE- :

: VDE-REG. : B437

UL- :

UL : E75770

:

-40°C to +100°C, short-term up to +125°C

가 VAT 가 가 .



EPIC® H-A 3 AGSV

	Article description	M			/ PU
H-A	:	-	()	
19517200	H-A 3 MAgsV M20	20		-	10
19515200	H-A 3 AgsV M20	20			10

(24.04.2024)


©2024 Lapp Group - all rights reserved.

<http://lappkorea.lappgroup.com>

data sheet

PN 0456 / 02_03.16

EPIC® H-A 3 AGSV

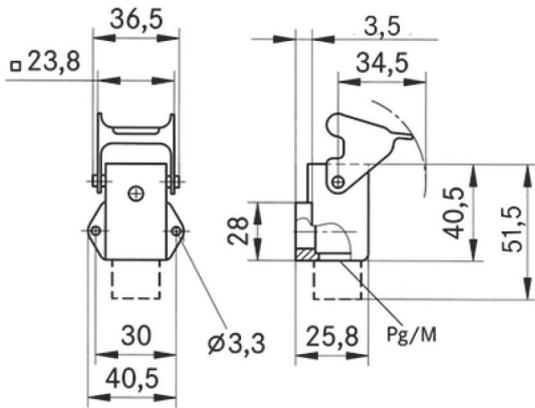

(24.04.2024)

©2024 Lapp Group - all rights reserved.
<http://lappkorea.lappgroup.com>

data sheet

PN 0456 / 02_03.16