


EPIC® H-A 3 AGSV

UL50E

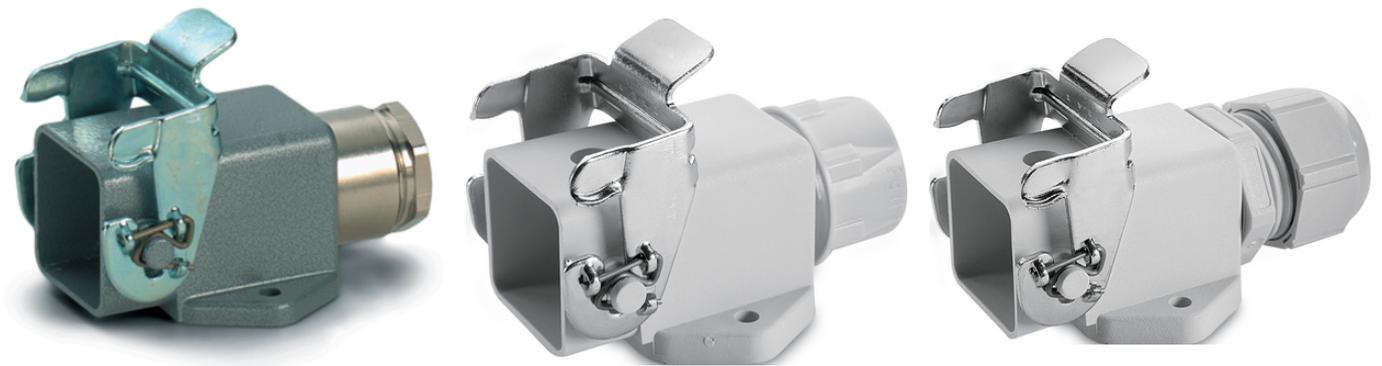

Housing in plastic or metal version for safe connections in the smallest possible space

1
1

가 /

(24.04.2024)

EPIC® H-A 3 AGSV

ETIM 5:

ETIM 5.0 Class-ID: EC000437

ETIM 5.0 class :

ETIM 6:

ETIM 6.0 Class-ID: EC000437

ETIM 6.0 Class-Description: Housing for industrial connectors

:

: - - ,

: -

: NBR

: 가 ,

: -

: NBR

가:

IP 65 (latched)

NEMA 250, UL50E: 12, 4 (latched)

VDE- :

: VDE-REG. : B437

UL- :

UL : E75770

:

-40°C to +100°C, short-term up to +125°C

가 VAT 가 가 .



EPIC® H-A 3 AGSV

	Article description	M	PG					/ PU
H-A	:	-	(1	,)			
10512700	H-A 3 MAgsv	-	11	-		-	-	10
10424000	H-A 3 Agsv	-	11			-	-	10
10424500	H-A 3 MAgsv	-	11	-		yes	6.5 - 12	10
10424200	H-A 3 Agsv	-	11			yes	6.5 - 12	10
19512700	H-A 3 MAgsv M20	20	-	-		-	-	10
19421900	H-A 3 Agsv M20	20	-			yes	6.0 - 13.0	10
19424500	H-A 3 MAgsv M20	20	-	-		yes	3 - 13.5	10

(24.04.2024)


©2024 Lapp Group - all rights reserved.

<http://lappkorea.lappgroup.com>

data sheet

PN 0456 / 02_03.16

EPIC® H-A 3 AGSV

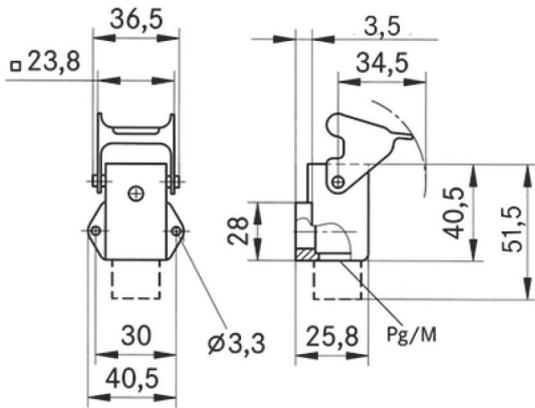

(24.04.2024)