

# EPIC® H-A 32



400V H-A

H-A

가 .

400V

Made in Germany

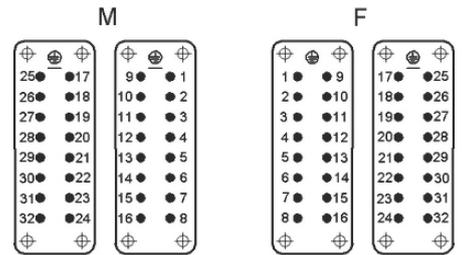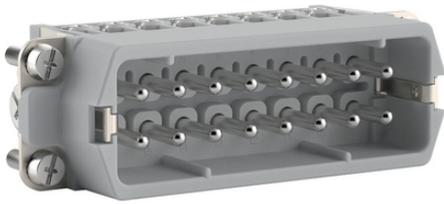

400V

(21.07.2024)

# EPIC® H-A 32

PH1

Railway applications

- Fire protection on railway vehicles: Test according EN 45545-2. Requirement sets R22 and R23. Hazard level HL1, HL2 and HL3

ETIM 5:	ETIM 5.0 Class-ID: EC000438
	ETIM 5.0 class :
ETIM 6:	ETIM 6.0 Class-ID: EC000438
	ETIM 6.0 Class-Description: Contact insert for industrial connectors
(V):	IEC: 400 V
	UL: 600 V
	CSA: 600 V
:	4 kV
(A):	IEC: 16 A
	UL: 14 A
	CSA: 16 A
:	3
:	UL94 V-0
:	1.5 - 4 mohm
:	
/ :	16 + PE
:	: 0.5 - 2.5 mm <sup>2</sup>
(mm):	8
:	PC,
:	500
VDE- :	: VDE-REG. : B437
	UL- :
	UL : E75770
:	-40°C ~ +120°C

가 VAT 가 가 .

(21.07.2024)



## EPIC® H-A 32

	Article description	Contact type			Packaging unit
H-A 32					
10540000	H-A 16 SS		yes	17 - 32	5
10541000	H-A 16 BS		yes	17 - 32	5
10542000	H-A 16 SS		-	17 - 32	5
10543000	H-A 16 BS		-	17 - 32	5

(21.07.2024)

©2024 Lapp Group - all rights reserved.  
<http://lappkorea.lappgroup.com>

data sheet

PN 0456 / 02\_03.16