


EPIC® H-B 16 TSB

H-B.

2 가

가

NEMA 250, UL50E: 12, 4 (latched)

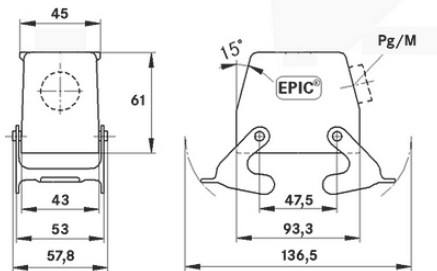

Lapp



2 가

(22.07.2024)

©2024 Lapp Group - all rights reserved.

<http://lappkorea.lappgroup.com>

data sheet

PN 0456 / 02_03.16

EPIC® H-B 16 TSB

, low

()

ETIM 5:

ETIM 5.0 Class-ID: EC000437

ETIM 5.0 class :

ETIM 6:

ETIM 6.0 Class-ID: EC000437

ETIM 6.0 Class-Description: Housing for industrial connectors

:

: - ,

:

: NBR

가:

IP 65 (latched)

VDE- :

: VDE-REG. : B437

UL- :

UL : E75770

:

-40°C to +100°C, short-term up to +125°C

가 VAT 가 가 .

(22.07.2024)

©2024 Lapp Group - all rights reserved.

<http://lappkorea.lappgroup.com>

data sheet

PN 0456 / 02_03.16



EPIC® H-B 16 TSB

| | Article description | M | PG | Neck | Packaging unit |
|----------|---------------------|----|----|------|----------------|
| H-B | : | (| , |) | |
| 10083000 | H-B 16 TSB 21 | - | 21 | yes | 5 |
| 19083000 | H-B 16 TSB M25 | 25 | - | yes | 5 |

(22.07.2024)

©2024 Lapp Group - all rights reserved.

<http://lappkorea.lappgroup.com>

data sheet

PN 0456 / 02_03.16