

: HHC2

The mixed assembly guarantees high flexibility. For applications in machine and plant engineering, for robotics and slide-in technology.



Lapp

1  
Crimp connection for permanent vibration proof contacting

ETIM 5:	ETIM 5.0 Class-ID: EC002641	
	ETIM 5.0	: ( )
ETIM 6:	ETIM 6.0 Class-ID: EC002641	
	ETIM 6.0 Class	: ( )
(V):	1000	
:	8 kV	

(22.07.2024)

: HHC2

(A): 150  
: 3  
/ : 2  
: : 16 mm<sup>2</sup> ... 35 mm<sup>2</sup>  
: PA6  
: 500  
: -40°C ... +125°C

\* ,  
PE ( < 0.25 ) PE  
가 가 .  
가 VAT 가 가 .



: HHC2

	Article description	Contact type	Slots	Packaging unit
	: HHC2			
44424017	MCS HHC2		2	10
44424018	MCB HHC2		2	10

(22.07.2024)


©2024 Lapp Group - all rights reserved.

<http://lappkorea.lappgroup.com>

data sheet

PN 0456 / 02\_03.16

: HHC2

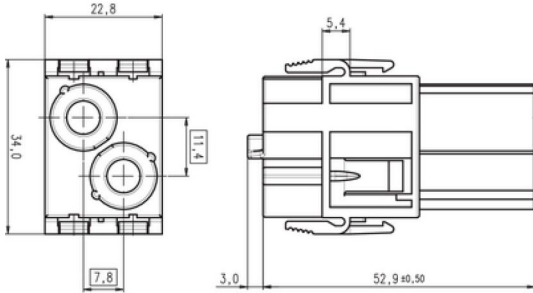

(22.07.2024)

©2024 Lapp Group - all rights reserved.

<http://lappkorea.lappgroup.com>

data sheet

PN 0456 / 02\_03.16