


# EPIC® MH 24 multi frame

가

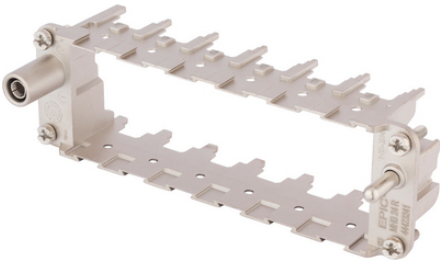

EPIC® MH 가

1

Railway applications

- Fire protection on railway vehicles: Test according EN 45545-2. Requirement sets R22 and R23. Hazard level HL1, HL2 and HL3

PE 1mm<sup>2</sup> ~ 6mm<sup>2</sup>, , 10mm<sup>2</sup>

(20.07.2024)

©2024 Lapp Group - all rights reserved.

<http://lappkorea.lappgroup.com>

data sheet

PN 0456 / 02\_03.16



# EPIC® MH 24 multi frame

/

ETIM 5:

ETIM 5.0 Class-ID: EC002641

ETIM 5.0 : ( )

ETIM 6:

ETIM 6.0 Class-ID: EC002641

ETIM 6.0 Class : ( )

:

:

500

:

-40°C

+125°C

가 VAT 가 가 .

(20.07.2024)

©2024 Lapp Group - all rights reserved.

<http://lappkorea.lappgroup.com>

data sheet

PN 0456 / 02\_03.16



## EPIC® MH 24 multi frame

	Article description	Contact type	Slots	Packaging unit
44423240	EPIC® MHS 24 R (A, B, C, D, E, F)		6	10
44423241	EPIC® MHB 24 R (a, b, c, d, e, f)		6	10

(20.07.2024)

©2024 Lapp Group - all rights reserved.

<http://lappkorea.lappgroup.com>

data sheet

PN 0456 / 02\_03.16