

**FLEXIMARK®**

**SQUIX**

**EOS5 \***


FLEXIMARK®

SQUIX

EOS 5

300dpi

( : +4615577764, : support@fleximark.se)

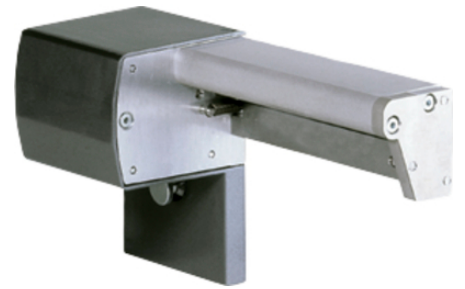

( 150 mm/ )  
: 300dpi

FLEXIMARK® 10.0

( , FLEXIMARK® , PUR TA )

EOS 5

FLEXIMARK® 10.0

FLEXIMARK® SQUIX EOS 5

Windows®

USB ( 1.8m)

(30.04.2024)



FLEXIMARK®

SQUIX EOS5 \*

ETIM 5:	ETIM 5.0 Class-ID: EC001675
	ETIM 5.0 Class : / /MFC
ETIM 6:	ETIM 6.0 Class-ID: EC001675
	ETIM 6.0 Class : / /MFC
Dimensions:	SQUIX: 274x242x446 mm (HxWxD)
	EOS5: 245x264x412mm ( x x )
:	Material thickness:
	0.03-0.60 mm (SQUIX)
	0.05-0.60 mm (EOS5)
	Carrier width:
	10-120 mm (SQUIX)
	10-116 mm (EOS5)
	Ø: 38.0-100.0mm (SQUIX) 38-76mm (EOS5)
:	500m (SQUIX) 360m (EOS5)
: 10/100 Mbit/s:	EOS5: Up to 150.00 mm/s
	SQUIX: Up to 300,00 mm/s
:	SQUIX: 9.0 kg
	EOS5: 5 kg
:	

\*

가 VAT	가	가	) LCK 32	640	640	1	PU
FLEXIMARK®							



FLEXIMARK®

SQUIX

EOSS \*

		PU
83259532	FLEXIMARK® EOS5/300	1
83259602	FLEXIMARK® Thermoprinter SQUIX 4/300M	1
83259536	FLEXIMARK® EOS5	1
83259603	FLEXIMARK® Perforation cutter PCU400 SQUIX	1

(30.04.2024)

©2024 Lapp Group - all rights reserved.

<http://lappkorea.lappgroup.com>

data sheet

PN 0456 / 02\_03.16