


HITRONIC® FIRE

, LSZH ;

HITRONIC® FIRE- A/J-DQ(ZN)BH(SR)H-

" 가 90"
* 180

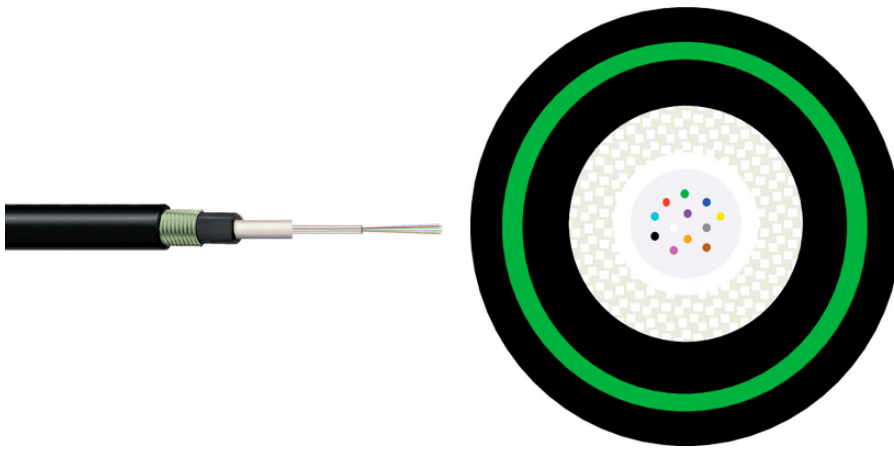

가

가
가
(IEC 60331-25)

가

(24.04.2024)

HITRONIC® FIRE

가 가
 : ,

Fire behaviour:
 - Halogen-free (IEC 60754-1)
 - Flame-retardant (IEC 60332-3)
 - Low smoke density (IEC 61034-1/2)
 - Circuit integrity (IEC 60331-25);
 Optical fibre cables
 24

FRNC
 : (RAL 9005)

ETIM 5:	ETIM 5.0 Class-ID: EC000034
	ETIM 5.0 Class-Description:
ETIM 6:	ETIM 6.0 Class-ID: EC000034
	ETIM 6.0 Class : LWL
:	1 : 250µm
:	:

Fibre type:	GOF - Glass Optical Fibre
::	A/J-DQ(ZN)BH(SR)H
:	:
:	:
가 :	: 15 x
	: 20 x
가 :	: 1500 N
	: 2,200N
:	: -30°C +70°C

, 가 가 . (.) 가 .



HITRONIC® FIRE

가 VAT 가 가 .
 OM4 가 .

(24.04.2024)



HITRONIC® FIRE

		Fibre type	Number of fibres	(mm)	(kg/km)
Multimodale G50 OM4					
27560404	HITRONIC FIRE 4G 50/125 OM4	50/125 OM4	4	9.6	123
27560408	HITRONIC FIRE 8G 50/125 OM4	50/125 OM4	8	9.6	123
27560412	HITRONIC FIRE 12G 50/125 OM4	50/125 OM4	12	9.6	123
27560424	HITRONIC FIRE 24G 50/125 OM4	50/125 OM4	24	12.6	188
G 50 OM3					
27560304	HITRONIC® FIRE 4G 50/125 OM3	50/125 OM3	4	9.6	123
27560308	HITRONIC® FIRE 8G 50/125 OM3	50/125 OM3	8	9.6	123
27560312	HITRONIC® FIRE 12G 50/125 OM3	50/125 OM3	12	9.6	123
27560324	HITRONIC® FIRE 24G 50/125 OM3	50/125 OM3	24	12.6	188
G 50 OM2					
27560204	HITRONIC® FIRE 4G 50/125 OM2	50/125 OM2	4	9.6	123
27560208	HITRONIC® FIRE 8G 50/125 OM2	50/125 OM2	8	9.6	123
27560212	HITRONIC® FIRE 12G 50/125 OM2	50/125 OM2	12	9.6	123
27560224	HITRONIC® FIRE 24G 50/125 OM2	50/125 OM2	24	12.6	188
G 62.5 OM1					
27560104	HITRONIC® FIRE 4G 62.5/125 OM1	62,5/125 OM1	4	9.6	123
27560108	HITRONIC® FIRE 8G 62.5/125 OM1	62,5/125 OM1	8	9.6	123
27560112	HITRONIC® FIRE 12G 62.5/125 OM1	62,5/125 OM1	12	9.6	123
27560124	HITRONIC® FIRE 24G 62.5/125 OM1	62,5/125 OM1	24	12.6	188
E 9 OS2					
27560904	HITRONIC® FIRE 4E 9/125 OS2	9/125 OS2	4	9.6	123
27560908	HITRONIC® FIRE 8E 9/125 OS2	9/125 OS2	8	9.6	123

(24.04.2024)

©2024 Lapp Group - all rights reserved.

<http://lappkorea.lappgroup.com>

data sheet

PN 0456 / 02_03_16



HITRONIC® FIRE

		Fibre type	Number of fibres	(mm)	(kg/km)
	OS2				
27560912	HITRONIC® FIRE 12E 9/125 OS2	9/125 OS2	12	9.6	123
27560924	HITRONIC® FIRE 24E 9/125 OS2	9/125 OS2	24	12.6	188

(24.04.2024)

©2024 Lapp Group - all rights reserved.

<http://lappkorea.lappgroup.com>

data sheet

PN 0456 / 02_03.16