


# HITRONIC® HQA-Plus

, PE ; ADSS  
HITRONIC® HQA ADSS plus , , 2  
A-DQ2Y(ZN)2Y

ADSS - All Dielectric Self Supporting  
For harsh weather conditions

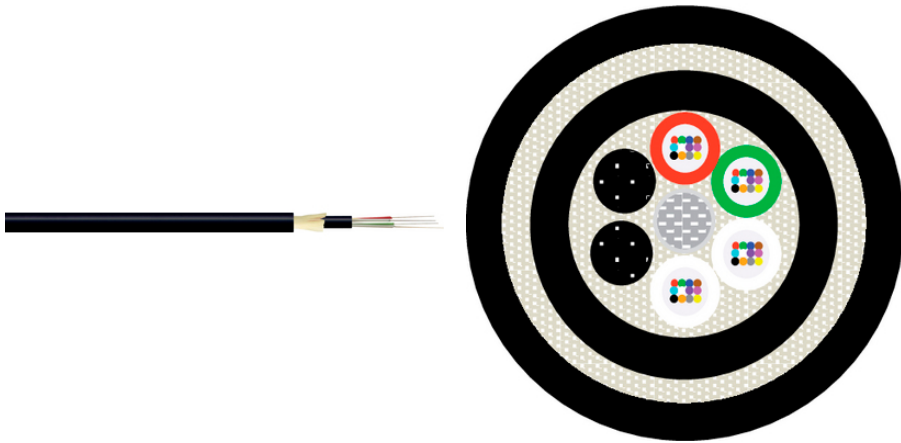

( )

# HITRONIC® HQA-Plus

가 96  
( )  
250m

8  
GRP  
(Aramid Yarns)  
PE  
: (RAL 9005)

ETIM 5: ETIM 5.0 Class-ID: EC000034

ETIM 5.0 Class-Description:

ETIM 6: ETIM 6.0 Class-ID: EC000034

ETIM 6.0 Class : LWL

: 1 : 250µm

:

:

Fibre type: GOF - Glass Optical Fibre

:: A-DQ2Y(ZN)2Y ADSS

All-Dielectric Self-Supporting

:

:

:

:

가 : : 15 x

: 20 x

가 : MAT: 8000 N

EDS: 3200 N

: : -40°C ~ +70°C

: -30 °C ~ +70 °C

가 VAT 가 가 .  
가

(25.04.2024)

©2024 Lapp Group - all rights reserved.

<http://lappkorea.lappgroup.com>

data sheet

PN 0456 / 02\_03.16



# HITRONIC® HQA-Plus

		Fibre type	Number of fibres	(mm)	(kg/km)
E 9 OS2					
26644912	HITRONIC® HQA-Plus3200 6x2E 9/125 OS2	9/125 OS2	12	12.8	132
26644924	HITRONIC® HQA-Plus3200 6x4E 9/125 OS2	9/125 OS2	24	12.8	132
26644948	HITRONIC® HQA-Plus3200 6x8E 9/125 OS2	9/125 OS2	48	13.7	151
26644972	HITRONIC® HQA-Plus3200 6x12E 9/125 OS2	9/125 OS2	72	13.7	153
26644996	HITRONIC® HQA-Plus3200 8x12E 9/125 OS2	9/125 OS2	96	15.3	188

(25.04.2024)

©2024 Lapp Group - all rights reserved.

<http://lappkorea.lappgroup.com>

data sheet

PN 0456 / 02\_03.16