


HITRONIC® HVN

가

HITRONIC® HVN , , ,

12 가 A-DQ(ZN)B2Y

Telecommunication cable, high number of fibers (up to 144)

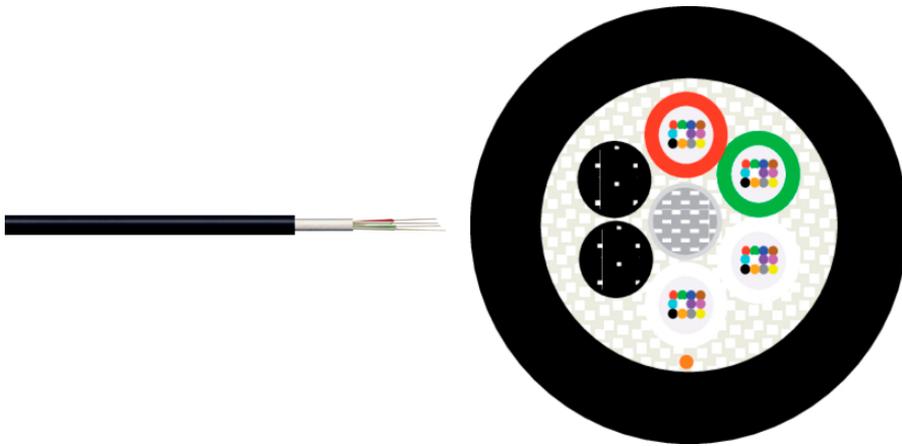

()

(24.04.2024)

HITRONIC® HVN

WAN

: ,

가 144
(가 12 12)

-

12
GRP

PE

: (RAL 9005)

ETIM 5:

ETIM 5.0 Class-ID: EC000034
ETIM 5.0 Class-Description:

ETIM 6:

ETIM 6.0 Class-ID: EC000034
ETIM 6.0 Class : LWL

:

1 : 250µm

:

Fibre type:

GOF - Glass Optical Fibre

::

A-DQ(ZN)B2Y

:

:

:

:

가 :

: 15 x

: 20 x

:

: -40°C ~ +70°C

, 가 가 . (.) 가 .

가 VAT 가 가 .
가

(24.04.2024)



HITRONIC® HVN

		Fibre type	Number of fibres	(mm)	(kg/km)
G 50 OM4					
26600424	HITRONIC® HVN5000 2x12G 50/125 OM4	50/125 OM4	24	11	64
26600448	HITRONIC® HVN5000 4x12G 50/125 OM4	50/125 OM4	48	11	84
G 50 OM3					
26600324	HITRONIC® HVN5000 2x12G 50/125 OM3	50/125 OM3	24	11	64
26600348	HITRONIC® HVN5000 4x12G 50/125 OM3	50/125 OM3	48	11	84
G 50 OM2					
26600224	HITRONIC® HVN5000 2x12G 50/125 OM2	50/125 OM2	24	11	64
26600248	HITRONIC® HVN5000 4x12G 50/125 OM2	50/125 OM2	48	11	84
E 9 OS2					
26600924	HITRONIC® HVN5000 2x12E 9/125 OS2	9/125 OS2	24	11	64
26600948	HITRONIC® HVN5000 4x12E 9/125 OS2	9/125 OS2	48	11	84

(24.04.2024)

©2024 Lapp Group - all rights reserved.

<http://lappkorea.lappgroup.com>

data sheet

PN 0456 / 02_03.16