


HITRONIC® HVW

가
HITRONIC® HVW 가 가
A-DQ(ZN)B2Y(SR)2Y nx12

가 (CST)가

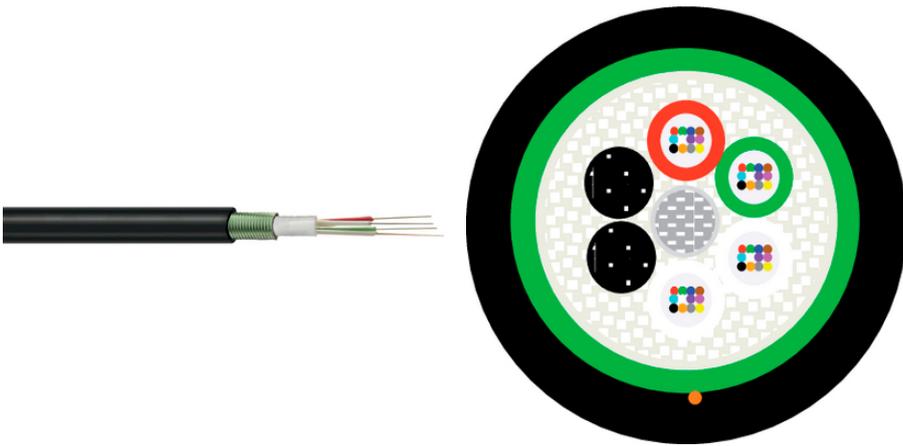

WAN

(24.04.2024)

HITRONIC® HVW

가 144
(가 12 12)

12

PE
: (RAL 9005)

ETIM 5: ETIM 5.0 Class-ID: EC000034
ETIM 5.0 Class-Description:
ETIM 6: ETIM 6.0 Class-ID: EC000034
ETIM 6.0 Class : LWL
: 1 : 250µm
:

Fibre type: GOF - Glass Optical Fibre
:: A-DQ(ZN)(SR)2Y
:
:
가 : : 15 x
: 20 x
가 : : 3000N
: 5,000N
: : -40°C ~ +70°C

, 가 가 . (.) 가 .
가 VAT 가 가 .



HITRONIC® HVW

		Fibre type	Number of fibres	(mm)	(kg/km)
E 9 OS2					
26900924	HITRONIC® HVW3000 2x12E 9/125 OS2	9/125 OS2	24	10	98
26900948	HITRONIC® HVW3000 4x12E 9/125 OS2	9/125 OS2	48	12.5	148
26900972	HITRONIC® HVW3000 6x12E 9/125 OS2	9/125 OS2	72	16	215
26900996	HITRONIC® HVW3000 8x12E 9/125 OS2	9/125 OS2	96	16	222
26900944	HITRONIC® HVW3000 12x12E 9/125 OS2	9/125 OS2	144	18.5	261

(24.04.2024)

©2024 Lapp Group - all rights reserved.

<http://lappkorea.lappgroup.com>

data sheet

PN 0456 / 02_03.16