


# LiY

LIY, , PVC, , , . +70°C

PVC

PVC

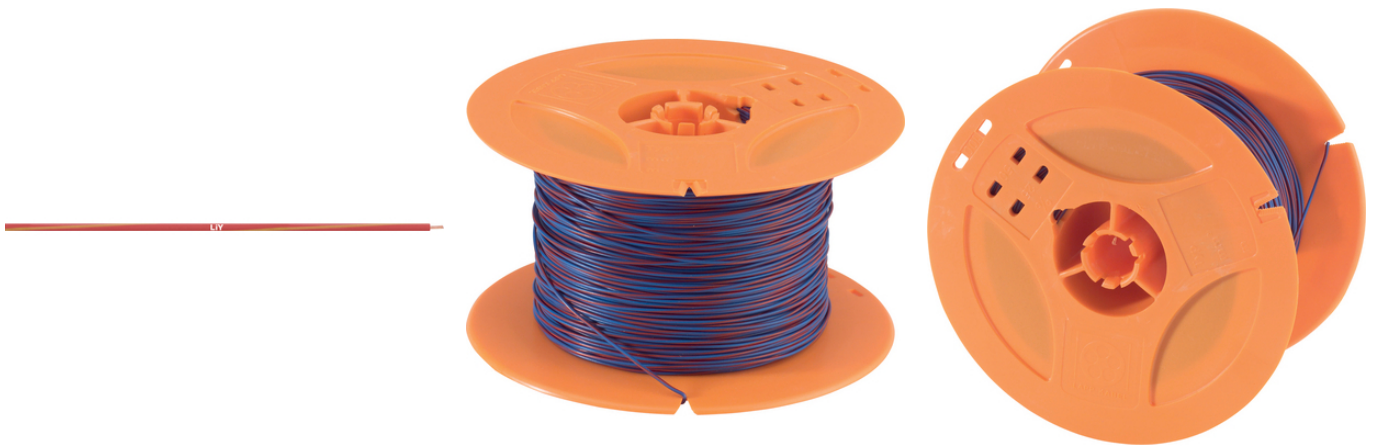

: IEC 60332-1-2  
: d1 = 18 mm; d2 = 150 mm; b = 85 mm

VDE 0812

: VDE 0207-4 PVC , type YI 2/1 2

ETIM 5:	ETIM 5.0 Class-ID: EC000993
	ETIM 5.0 Class :
ETIM 6:	ETIM 6.0 Class-ID: EC000993
	ETIM 6.0 Class :
:	900 V (0.25 sq.mm)

# LiY

: 0.25 mm<sup>2</sup> : 14 가 ( 0.15 mm Ø)  
:  
: < 50 VAC  
UPP - - - : 250 V  
:  
: 2500 V (0.25 mm<sup>2</sup>)  
:  
: -30°C +70°C

, , 가 가 . ( . ) 가 .  
,  
가 VAT 가 가 .

		(mm <sup>2</sup> )	(mm)	m/	(kg/km)
4502232S	/	0.25	1.5	250	2.4
4502262S	/	0.25	1.5	250	2.4
4502282S	/	0.25	1.5	250	2.4
4502292S	/	0.25	1.5	250	2.4
4502302S	-	0.25	1.5	250	2.4
4502312S	-	0.25	1.5	250	2.4
4502342S	-	0.25	1.5	250	2.4
4502372S	-	0.25	1.5	250	2.4
4502392S	-	0.25	1.5	250	2.4
4502402S	-	0.25	1.5	250	2.4
4502432S	=	0.25	1.5	250	2.4
4502442S	-	0.25	1.5	250	2.4
4502462S	-	0.25	1.5	250	2.4

LiY

