



ÖLFLEX® SERVO 7TCE

, 가

ÖLFLEX® SERVO 7TCE - screened servo cable for fixed installation or occasional flexing with UL TC-ER.

EMC- (NFPA 70/NEC)/ NFPA 79

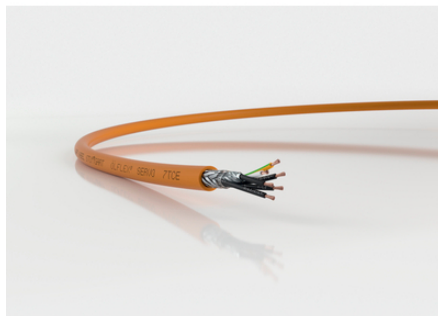

, 가

UL TC-ER c(UL) CIC/TC

(23.04.2024)

ÖLFLEX® SERVO 7TCE

NEC 501 (Class 1 Division 2)

UL OIL RES I & II
CSA FT4 UL
-40°C Cold Bend; -25°C Cold Impact; 90°C Wet or Dry
;

UL 1277 UL TC-ER ()
NEC 501 Class 1 Division 2
UL 2277 Flexible Motor Supply Cable
c(UL) CIC FT4 (18AWG - 14AWG);
cRU AWM I/II A/B FT4

: XLPE

: 가 (TPE),

ETIM 5:

ETIM 5.0 Class-ID: EC000057
ETIM 5.0

: U/L1/C/L+ ; V/L2; W/L3/D/L-;

GN/YE

1 : /
2 : / 5, 6, 7, 8

USA: UL TC-ER, Flexible Motor Supply Canada: c(UL) CIC/TC
FT4, cRU AWM I/II A/B FT4

: 15 x

: 6 x

UL TC: 600V

UL Flexible Motor Supply: 1000V

c(UL) CIC/TC: 600V

cRU AWM: 1000V

IEC U0/U: 600/1000 V

2000 V

G = GN/YE

: -25°C ~ +90°C

: -40°C ~ +90°C

가 가 () 가
www.lappkabel.de/en/cable-standradlengths

(23.04.2024)

©2024 Lapp Group - all rights reserved.

<http://lappkorea.lappgroup.com>

data sheet

PN 0456 / 02_03.16



ÖLFLEX® SERVO 7TCE

: 30 kg or 250 m, (e.g. 1 x 610 m or 8 x 76 m).

가 VAT 가 가 .

(23.04.2024)

	(CORE) / (mm ²)	(mm)	(kg/km)	(kg/km)
700730	4 G 1,5	9.8	87.81	143
700731	4 G 2,5	11.0	132.46	199
700732	4 G 4	12.8	199.43	286
700733	4 G 6	14.1	281.29	373
700734	4 G 1,5 + (2 x 1,5)	12.6	147.34	240
700735	4 G 2,5 + (2 x 1,5)	13.3	190.5	301
700736	4 G 4 + (2 x 1,5)	15.8	259.12	432
700737	4 G 6 + (2 x 1,5)	17.0	354.22	496
700738	4 G 1,0 + 2 x (2 x 1,0)	13.2	166.69	277
700739	4 G 1,5 + 2 x (2 x 1,0)	13.9	187.53	314
700740	4 G 2,5 + 2 x (2 x 1,0)	15.5	229.2	387
700741	4 G 4 + (2 x 1,0) + (2 x 1,5)	17.0	325.94	487
700742	4 G 6 + (2 x 1,0) + (2 x 1,5)	18.1	409.29	574

(23.04.2024)

©2024 Lapp Group - all rights reserved.

<http://lappkorea.lappgroup.com>

data sheet

PN 0456 / 02_03.16