


# Mounting socket with saddle

TC



| mm     | A    | B    | C    | D   |
|--------|------|------|------|-----|
| TC 140 | 7,0  | 8,7  | 14,2 | 3,6 |
| TC 141 | 8,2  | 11,1 | 17,0 | 4,0 |
| TC 142 | 11,0 | 14,2 | 23,4 | 5,2 |

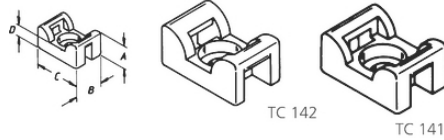

가

UL 94 V-2

ETIM 5:

ETIM 5.0 Class-ID: EC000449  
ETIM 5.0 :

ETIM 6:

ETIM 6.0 Class-ID: EC000449  
ETIM 6.0 Class :

:

6.6

:

:

-40°C +85°C

ABB / &

(24.04.2024)



## Mounting socket with saddle

가 VAT 가 가 .

(24.04.2024)



## Mounting socket with saddle

|          | Article description |  |        | (mm) | (mm) | (g/100 ) | / PU |
|----------|---------------------|--|--------|------|------|----------|------|
| 61724920 | TC 140              |  | PA 6.6 | 2.8  | 2.4  | 47       | 500  |
| 61724510 | TC 141              |  | PA 6.6 | 3.5  | 4.8  | 77       | 500  |
| 61724910 | TC 142              |  | PA 6.6 | 5.2  | 7.6  | 120      | 500  |

(24.04.2024)

©2024 Lapp Group - all rights reserved.

<http://lappkorea.lappgroup.com>

data sheet

PN 0456 / 02\_03.16